

STEREO VIDEOMIC

X/Y Stereo Directional Video Condenser Microphone

RØDE
MICROPHONES

Features


- Stereo X/Y Condenser Microphone
- Broadcast sound quality
- 9V battery powered
- Integrated shock mounting
- Two step High Pass Filter (Flat/80Hz)
- Rugged cast aluminium body
- Low noise circuitry
- Custom designed integrated windshield
- 3.5mm mini-jack output
- Integrated cold-shoe mount, 1/4" and 3/8" thread
- Designed and manufactured in Australia
- Full 10 year warranty*




Specifications

Acoustic Principle	Pressure Gradient	Directional Pattern	Super-Cardioid
Frequency Range	40Hz ~ 20,000Hz (selectable HPF@80Hz)	Sensitivity	-38dB $\pm$ 2dB re 1V/Pa @ 1kHz
Nominal Impedance	200 Ω	Equivalent Noise	20dBA SPL (A - weighted per IEC651)
Maximum Output	+6.9dBu (@ 1% THD into 1k Ω)	Dynamic Range	115dB (per IEC651)
Maximum SPL	134dB (@ 1kHz, 1% THD into 1k Ω load)	Signal/Noise	74dB SPL (A - weighted per IEC651)
Power Req.	9V alkaline battery (Current 7mA)	Dimensions	170mmL x 102mmH x 65mmD
Output Connection	3.5mm stereo mini-jack	Net Weight	176g

Frequency Response

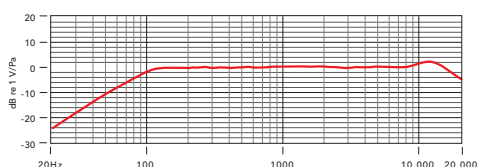

Polar Pattern



Included Accessories

- DeadKitten windscreen

www.rodemic.com

*After online registration

Australia
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
6385 Rose Lane, Carpinteria CA 93013 USA
Ph: +1 805 566 7777 Fx: +1 805 566 0071