




ASSEMBLY INSTRUCTION


NL4FC | speakON® - Lockable Loudspeaker Connector

Attention: speakON® is not to be used as an AC mains or power supply connector!

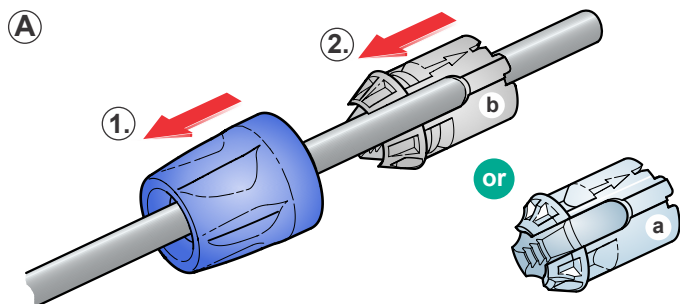


A Place the bushing (1) and the chuck (2) over the cable.

White chuck (a): 6.0 - 11.0 mm [0.236 - 0.433"]
Black chuck (b): 9.5 - 15.0 mm [0.374 - 0.59"]

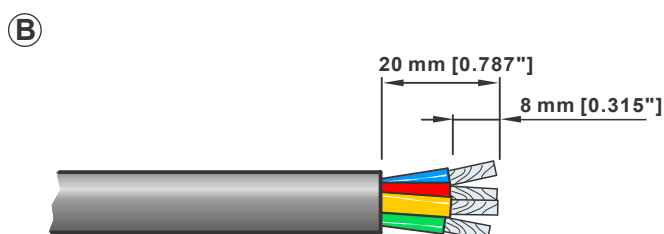


B Prepare the cable as shown.

Cable O.D.: 6.0 - 15.0 mm [0.236 - 0.59"]
Wire size: 4 mm² (AWG 12)

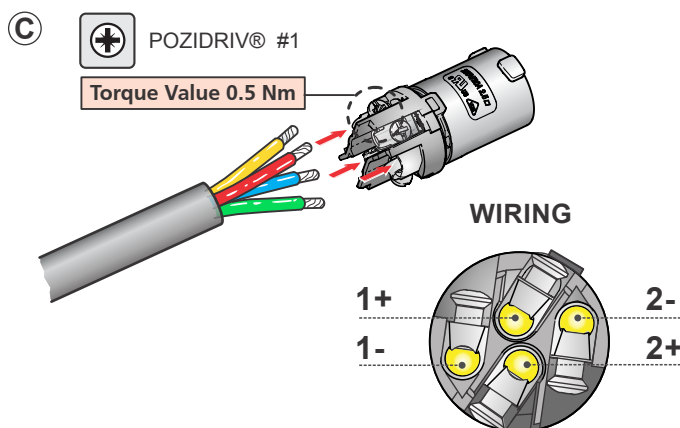

C Insert the wires into the terminals and fasten the clamping device with a screw driver (POZIDRIV® #1).

Max. torque 0.5 Nm (0.37 lb-ft).

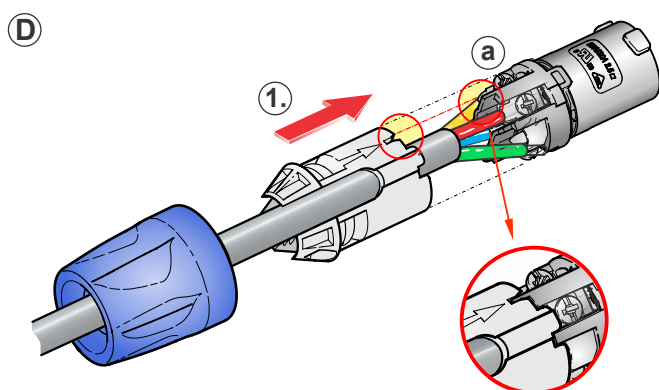


D Slide the chuck (1) onto the insert.

Important:
(a) Align the chuck by positioning the nose into the recess.






- E** Slide the insert and the chuck (1) into the housing (2).
- Important:**
(b) Pay attention to the guiding keyway!

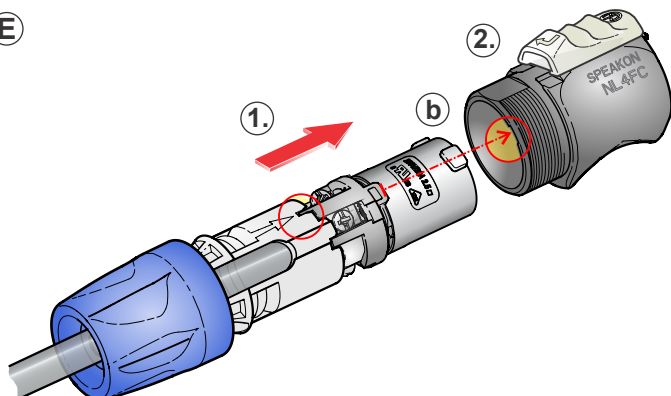


- F** Wrench size 7/8" (SW22)
- F** Fasten the bushing with a fork wrench 7/8" (SW 22).

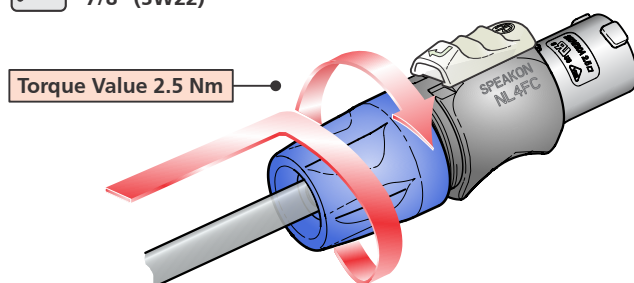

OPTION:
Use the handtool HTFAC to tighten the bushing.

FINISHED speakON

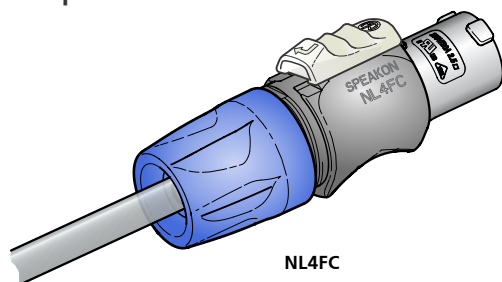

NL4FC



Find more details of speakON on www.neutrik.com.

Neutrik AG
Neutrik USA Inc.
Neutrik (UK) Ltd.
Neutrik Vertriebs GmbH

LI
USA
UK
DE/NL/AT/DK

T: +423 / 237 24 24
T: +1 704 / 972 3050
T: +44 1983 / 811 441
T: +49 8131 / 280 890

F: +423 / 232 53 93
F: +1 704 / 438 9202
F: +44 1983 / 811 439
F: +49 8131 / 280 830

Neutrik France
Neutrik Tokyo Ltd.
Neutrik Hong Kong Ltd.
Neutrik India Pvt. Ltd.

FR
JP
HK
IND

T: +33 1 / 4131 6750
T: +81 3 / 3663 4733
T: +852 / 2687 6055
T: +91 / 982 05 43 424

F: +33 1 / 4131 0511
F: +81 3 / 3663 4796
F: +852 / 2687 6052
F: +91 / 22 26163 540

Draft. Nr.: BDA 450 V2 | Update: 01.07.2019 | Data subject to change without prior notice. © 2019 NEUTRIK®. NEUTRIK® are registered trademark of NEUTRI AG. ALL RIGHTS RESERVED.